
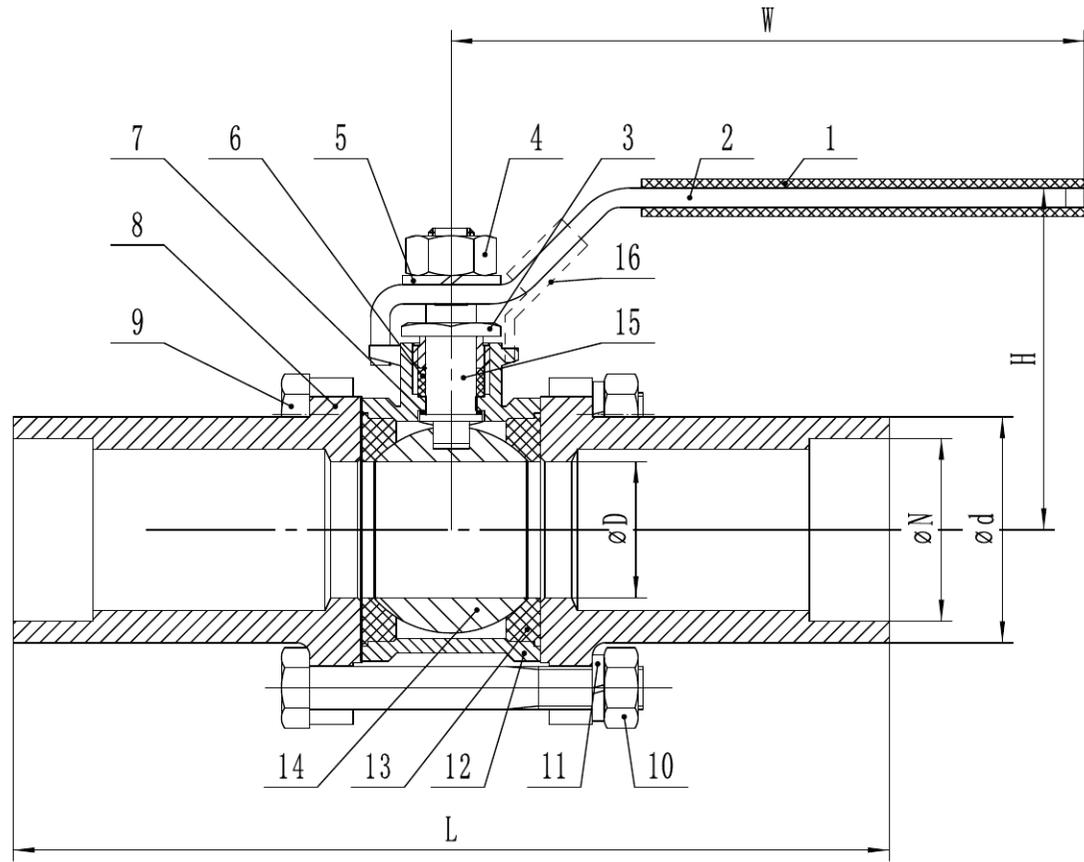


THREE PIECE SCREWED BALL VALVES ----- VT3L

- *For general chemical service application
- *Adjustable stem packing
- *Blow-out-proof stem design
- *Body and end caps quality investment casting
- *Available in carbon or stainless steel body construction
- *Designed for easy actuator mounting
- *100% tested by air under water, at 100 psi, open and closed positions

SPECIFICATIONS

- *Working pressure: 1/4" ~ 2" 1000 psi W.O.G
2 1/2" ~ 4" 800 psi W.O.G
- *End types: threaded

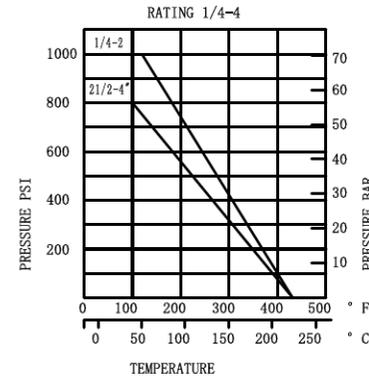

	D±0.5	L±0.5	H±2	W±2	d±0.5	N±0.5
1/4"	12.5	160	53	77	16.8	13.6
3/8"	12.5	160	53	77	16.8	13.6
1/2"	15	180	55	77	21.3	18.1
3/4"	20	180	63	105	26.9	23.7
1"	25	192	70	137	33.7	30.1
1-1/4"	32	205	76	137	42.4	38.4
1-1/2"	38	230	89	182	48.3	44.3
2"	50	243	97	182	60.3	55.3
2-1/2"	64	294	143	260	76.1	70.1
3"	76	320	152	260	88.8	82.8
4"	94	346	187	403	114.3	108.3

16	LOCKING DEVICE	1	304			
15	STEM	1	304/316			
14	BALL	1	CF8M/CF8			
13	BALL SEAT	2	PTFE			
12	BODY	1	CF8M/CF8			
11	SPRING WASHER	4-6	304			
10	NUT	4-6	304			
9	BOLT	4-6	304			
8	END CAP	1	CF8M/CF8			
7	THRUST WASHER	1	PTFE			
6	STEM PACKING	1	PTFE			
5	STEM WASHER	1	304			
4	STEM NUT	1	304			
3	GLAND NUT	1	304/316			
2	HANDLE	1	304			
1	PLASTIC SLEEVE	1	PLASTIC			

序号	代号	名称	数量	材料	单件	总计	备注
					重量		
					3PC BUTT WELD BALL VALVE		
标记	处数	分区	更改文件号	签名	年、月、日		
设计			标准化			阶段标记	重量 比例
审核							1:1
工艺			批准			共 张	第 张

借 (通) 用 件 登 记
旧底图总号
底图总号
签 字
日 期
档案员 日 期