


ONE PIECE SCREWED BALL VALVES

- *For general chemical service application
- *Adjustable stem packing
- *Blow-out-proof stem design
- *Body and end caps quality investment casting
- *Available in carbon or stainless steel body construction
- *100% tested by air under water, at 100 psi, open and closed positions


SPECIFICATIONS

- *Working pressure: 1/4" ~ 2" 1000 psi W.O.G
- 2 1/2" ~ 4" 800psi W.O.G
- *End types: threaded

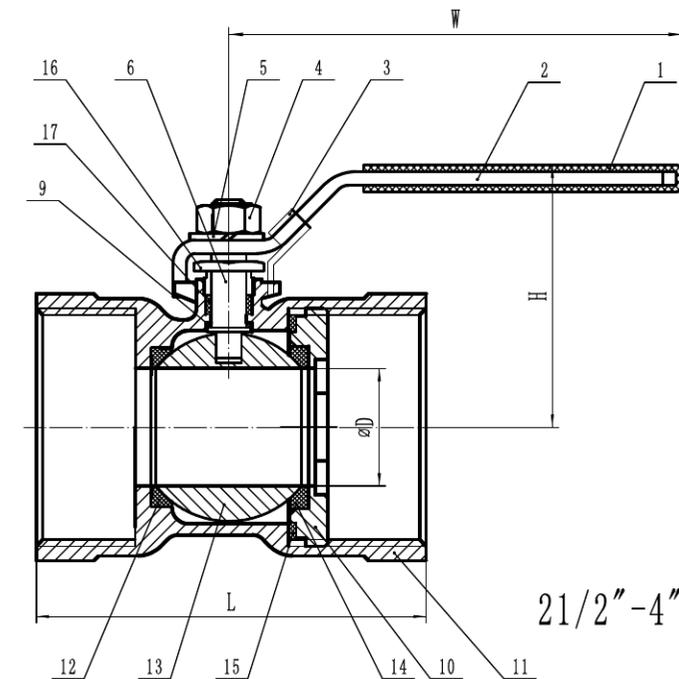

	$\varnothing D \pm 0.5$	$L \pm 1.6$	$H \pm 3$	$W \pm 3$	$S \pm 0.7$	
1/4	5	39.5	31	67	17	HEX
3/8	6.8	43.5	34	87	20.5	
1/2	9.2	57	39	96	25	
3/4	12.5	59	44	96	31.5	
1	15	71	48	112	37.5	
1-1/4	20	78	54	112	47	
1-1/2	25	82.5	60	142	52	
2	32	99	66	142	64	
2 1/2	38	120	80	156	83	OCT
3	50	140	100	194	98.5	
4	64	170	129	248	128	

序号	代号	名称	数量	材料	单件重量	总计重量	备注
17		STEM PACKING	1	PTFE			
16		GLAND NUT	1	304/316			
15		BODY SEAL	1	PTFE			
14		BALL SEAT(B)	1	PTFE			
13		BALL	1	304/316			
12		BALL SEAT(A)	1	PTFE			
11		BODY	1	CF8/CF8M			
10		CAP	1	CF8/CF8M			
9		THRUST WASHER	1	PTFE			
8		STEM PACKING	1	PTFE			
7		PACK RING	1	304			
6		STEM	1	304/316			
5		SPRING WASHER	1	304			
4		STEM NUT	1	304			
3		LOCKING	1	304			
2		HANDLE	1	304			
1		PLASTIC COVER	1	PLASTIC			



IPC BALL VALVE					
标记	处数	分区	更改文件号	签名	年、月、日
设计			标准化		
审核					
工艺			批准		
阶段标记			重量	比例	
				1:1	
共张			第	张	

借 (通) 用 件 登记
旧底图总号
底图总号
签字
日期
档案员
日期