


	φd	L±0.5	H	W
1/4"	12.5	48.5	48.0	93
3/8"	12.5	48.5	48.0	93
1/2"	15.0	58.0	53.0	104
3/4"	20.0	65.0	62.0	113
	25.0	76.5	66.5	128
1-1/4"	32.0	90.0	80.0	155
1-1/2"	38.0	99.0	83.0	155
	50.0	121.0	99.0	193
2-1/2"	65.0	145.0	128.0	246
	76.0	166.0	137.5	246
	94.0	239.0	176.0	317

Features:

- 1、Working Temperature: -20° C to +180° C
- 2、Full Port
- 3、Investment Casting
- 4、Blow-out Proof Stem
- 5、Locking Device Handle (Option)
- 6、PED 2014/68/EU
- 7、Casting Approved AD2000-WO
- 8、Thread:  
DIN 2999/259, ISO7/1, NPT
- 9、Inspection Testing:  
API598, EN12266-1

PRESSURE-TEMPERATURE RATING

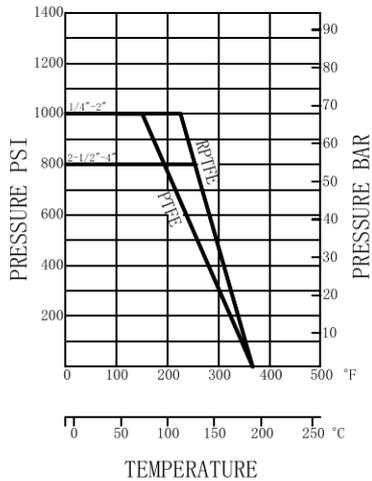

13	STEM NUT	304	1	
12	SPRING WASHER	304	1	
11	PLASTIC COVER	PLASTIC	1	
10	HANDLE	304	1	
9	STEM	304/316	1	
8	GLAND	304	1	
7	STEM PACKING	PTFE	1	
6	STEM SEAL	PTFE	1	
5	BODY SEAL	PTFE	1	
4	BALL SEAT	PTFE/RPTFE	2	
3	BALL	304/316	1	
2	CAP	CF8/CF8M	1	
1	BODY	CF8/CF8M	1	
NO.	PART NAME	MATERIAL	Q' TY	REMARKS
		2021-1-5	2PC	
			BALL VALVE	
				2PC
				BY-02-II F/F